
YORU Cable Ties Datasheet



Model YR100-09STL
Size Label 4" x 9.00 mm.



Color Silver Type Stainless (Ball Lock) Material Stainless Steel 304 (SUS304) Flammability UL.94 V-2 ROHS Compliant Yes UL Recognized Yes Releasable Closure No Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 12.18 mm. (Head) Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) Minimum Tensile Strength 220.0 lbs (Imperial) 100.0 Kgs (Metric) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum) Weight * 2.75 grams (1 piece)		
Material Stainless Steel 304 (SUS304) Flammability UL 94 V-2 ROHS Compliant Yes UL Recognized Yes Releasable Closure No Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 12.18 mm. (Head) Thickness ~0.24 mm. (Body) ± 10% Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) Minimum Tensile Strength Minimum Tensile Diameter 220.0 lbs (Imperial) 100.0 Kgs (Metric) 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Color	Silver
ROHS Compliant Yes	Туре	Stainless (Ball Lock)
ROHS Compliant Yes UL Recognized Yes Releasable Closure No Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 12.18 mm. (Body) ± 10% Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) Minimum Tensile Strength Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Material	Stainless Steel 304 (SUS304)
UL Recognized Yes Releasable Closure No Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 2.21.8 mm. (Head) Thickness ~ 0.24 mm. (Body) ± 10% Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) 220.0 lbs (Imperial) 100.0 Kgs (Metric) 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Flammability	UL94 V-2
Releasable Closure No Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 12.18 mm. (Body) ± 10% -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) Minimum Tensile Strength Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	ROHS Compliant	Yes
Length 4 inch (Imperial) 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) 12.18 mm. (Head) Operating Temperature ~0.24 mm. (Body) ± 10% -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) 220.0 lbs (Imperial) 100.0 Kgs (Metric) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	UL Recognized	Yes
Length 100 mm. (Metric) 9.00 mm. (Body) 12.18 mm. (Head) Thickness ≈ 0.24 mm. (Body) ± 10% -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) 220.0 lbs (Imperial) 100.0 Kgs (Metric) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Releasable Closure	No
100 mm. (Metric)	Length	4 inch (Imperial)
Width 12.18 mm. (Head) Thickness ≈ 0.24 mm. (Body) ± 10% Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) 220.0 lbs (Imperial) 100.0 Kgs (Metric) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)		100 mm. (Metric)
12.18 mm. (Head) Thickness ≈ 0.24 mm. (Body) ± 10% Operating Temperature -76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) 220.0 lbs (Imperial) 100.0 Kgs (Metric) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Width	9.00 mm. (Body)
-76°F to +1,022°F (Fahrenheit) -60°C to +550°C (Celsius) -60°C to +550°C (Celsius) -60°C to +550°C (Metric) -60°C to +550°C (Celsius) -60°C to +		12.18 mm. (Head)
Operating Temperature -60°C to +550°C (Celsius) Minimum Tensile Strength 220.0 lbs (Imperial) Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Thickness	≈ 0.24 mm. (Body) ± 10%
Continue	Operating Temperature	-76°F to +1,022°F (Fahrenheit)
Minimum Tensile Strength 100.0 Kgs (Metric) 21.0 mm. (Minimum) 25.0 mm. (Maximum)		-60°C to +550°C (Celsius)
Bundle Diameter 21.0 mm. (Minimum) 25.0 mm. (Maximum)	Minimum Tensile Strength	220.0 lbs (Imperial)
Bundle Diameter 25.0 mm. (Maximum)		100.0 Kgs (Metric)
25.0 mm. (Maximum)	Rundlo Diamotor	21.0 mm. (Minimum)
Weight ≈ 2.75 grams (1 piece)	bundle Diameter	25.0 mm. (Maximum)
	Weight	≈ 2.75 grams (1 piece)
Features Easy operation, Good insulation, Self-locking, Lightweight, Anti-corrosion and durability.	Features	Easy operation, Good insulation, Self-locking, Lightweight, Anti-corrosion and durability.

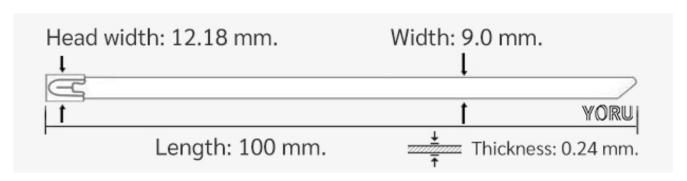





Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of \pm 5%).